

FEATURES

C²B receiver capable of receiving video data and bidirectional control data over a differential pair or single-ended cable
The parallel video output formats supported include
8-bit and 10-bit interleaved Y/C data up to 148.5 MHz
2 × 8-bit separate Y/C data up to 74.25 MHz
Embedded (start of active video (SAV)/end of active video (EAV) codes), separate HS/VS/DE, or image signal processor (ISP) line/frame valid type external timing signals

HD video formats supported up to 2 megapixels at 30 Hz or 1 megapixel at 60 Hz

Bidirectional control channel embedded in the C²B link for control and status data between C²B receiver and C²B transmitter

Enables remote configuration of the C²B transmitter

Bidirectional GPIO with either local or remote interfacing possibilities

On-chip high resolution, high speed ADC, buffer and anti-aliasing filter blocks for video and control channel path

Transmission of frame count data from ISP to enable the back-end ECU or HU to detect stuck or skipped frames

Video test pattern generator for easy system testing

Cable equalizer capable of compensating for cable and connector insertion loss, equivalent to a 30 m twisted pair cable

On-chip echo cancellation scheme to prevent visual impact caused by impedance mismatch between cables and connectors

Protection from and diagnosis of high voltages encountered during short to battery fault condition

Tested to industry standards for automotive EMC, EMI, and ESD robustness

General

2-wire serial interface (I²C compatible) for configuration of the C²B receiver and for communication with a remote C²B transmitter and image signal processors

Connected I²C master must support clock stretching to support remote I²C communication over the C²B link

–40°C to +105°C temperature grade

48-lead LFCSP package

AEC-Q100 qualified for automotive applications

APPLICATIONS

Automotive infotainment HUs

Automotive camera ECUs

SIMPLIFIED FUNCTIONAL BLOCK DIAGRAM

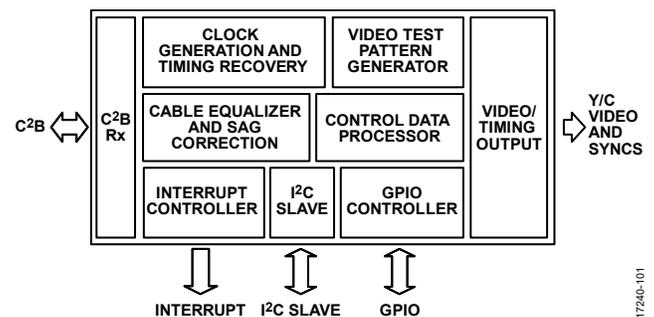


Figure 1.

17240-101

Complete technical specifications are available for the C²B transmitters and receivers. Contact c2b_web_support@analog.com to complete the nondisclosure agreement (NDA) required to receive additional product information.

C²B U.S. patents pending.



Rev. Sp0

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 ©2019 Analog Devices, Inc. All rights reserved.
[Technical Support](#) www.analog.com

NOTES

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).